
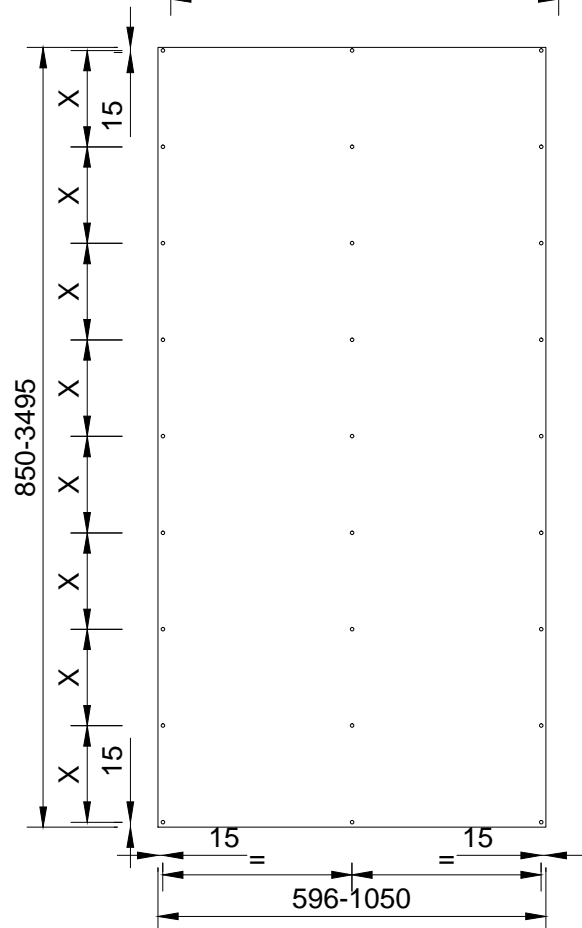
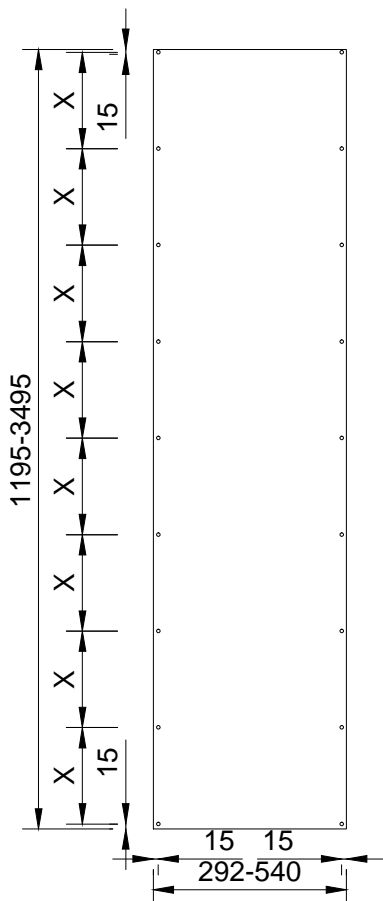
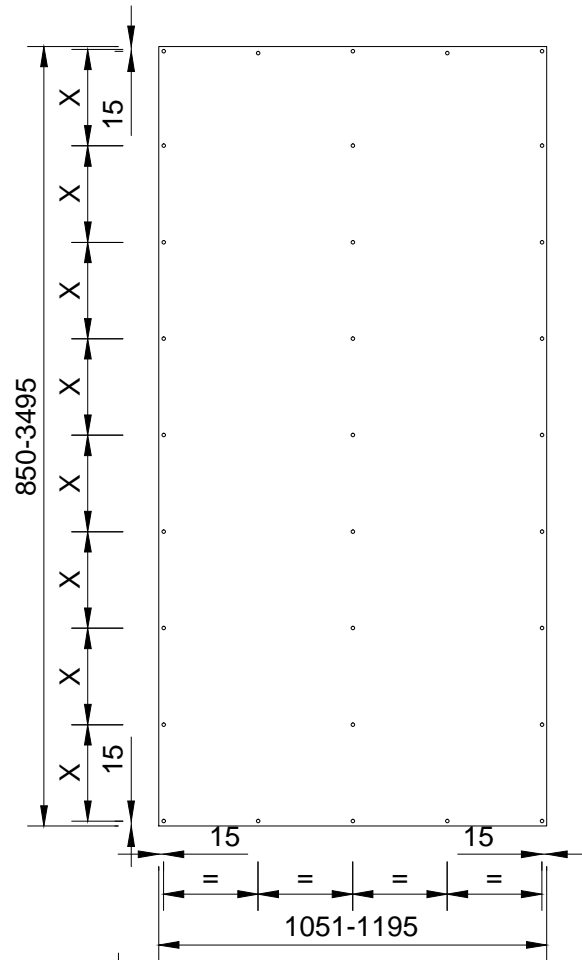


# NV01.

# Steni Nature

Vertical fixing,  $X \approx 300\text{mm}$  with ``kotling``. Max. 310mm Min 220mm

Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information see product list !!


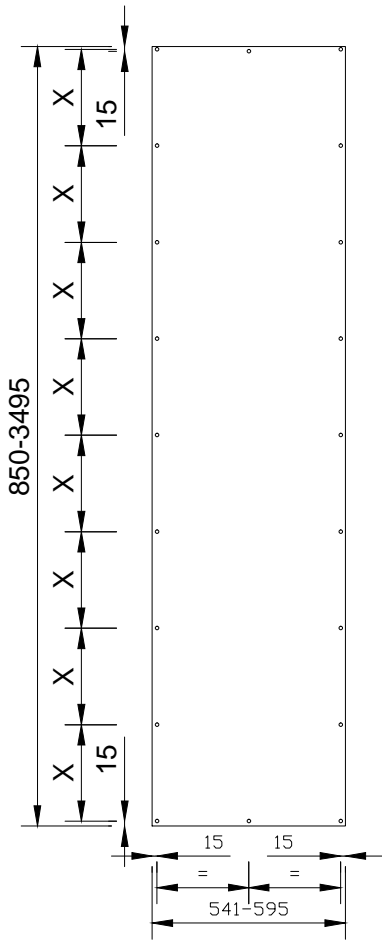


# NV02.

# Steni Nature


Vertical fixing,  $X \approx 300\text{mm}$ . Max. 310mm Min 220mm

Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information see product list !!

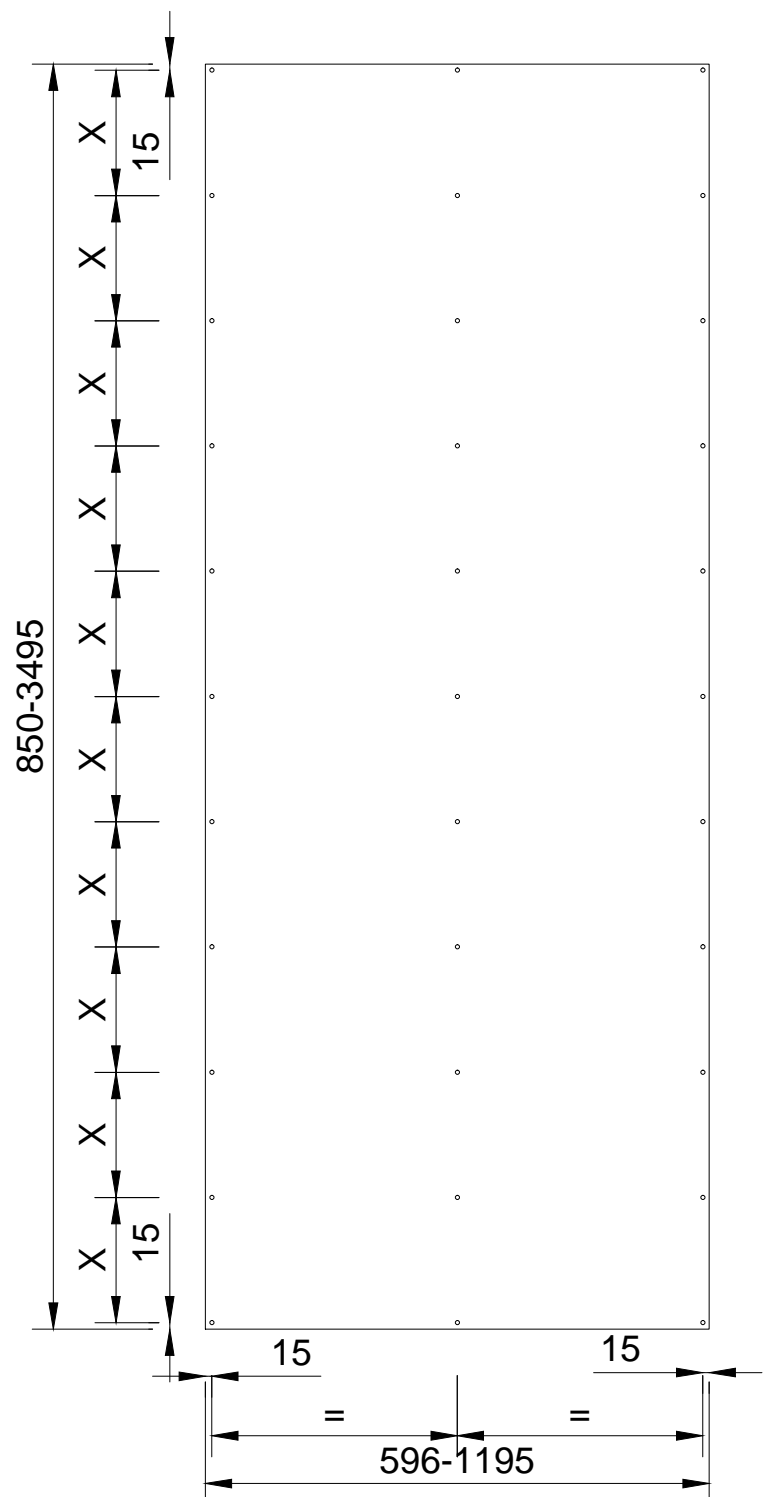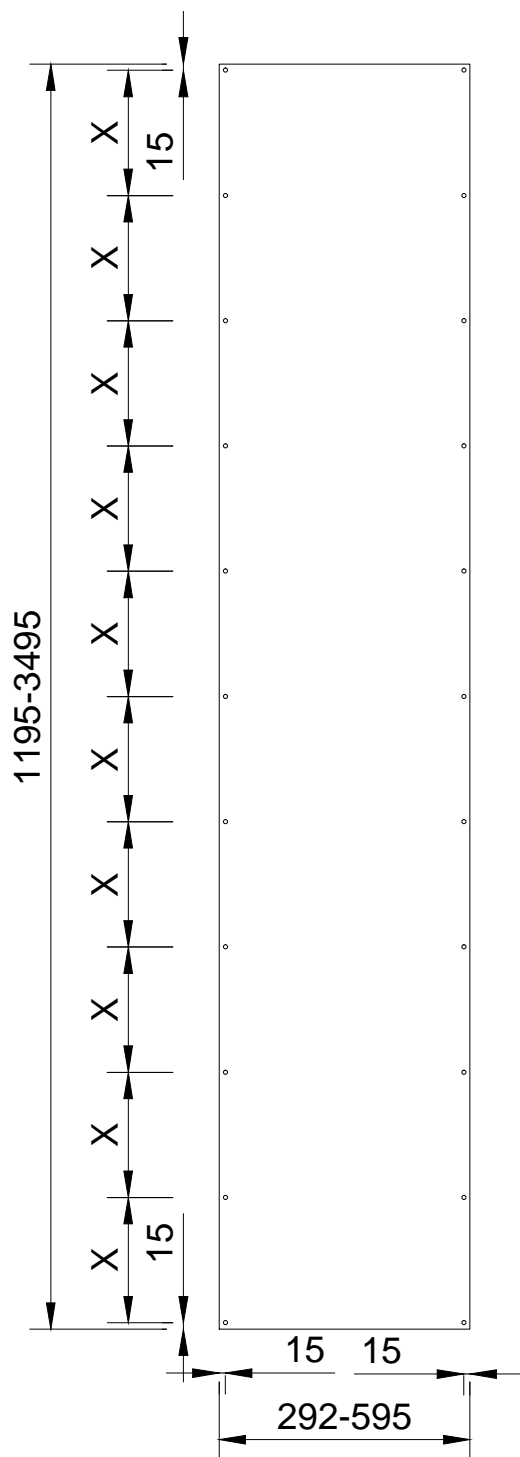

Vertical fixing, c.2.c 300mm, with 60mm from edges

Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information se product list!


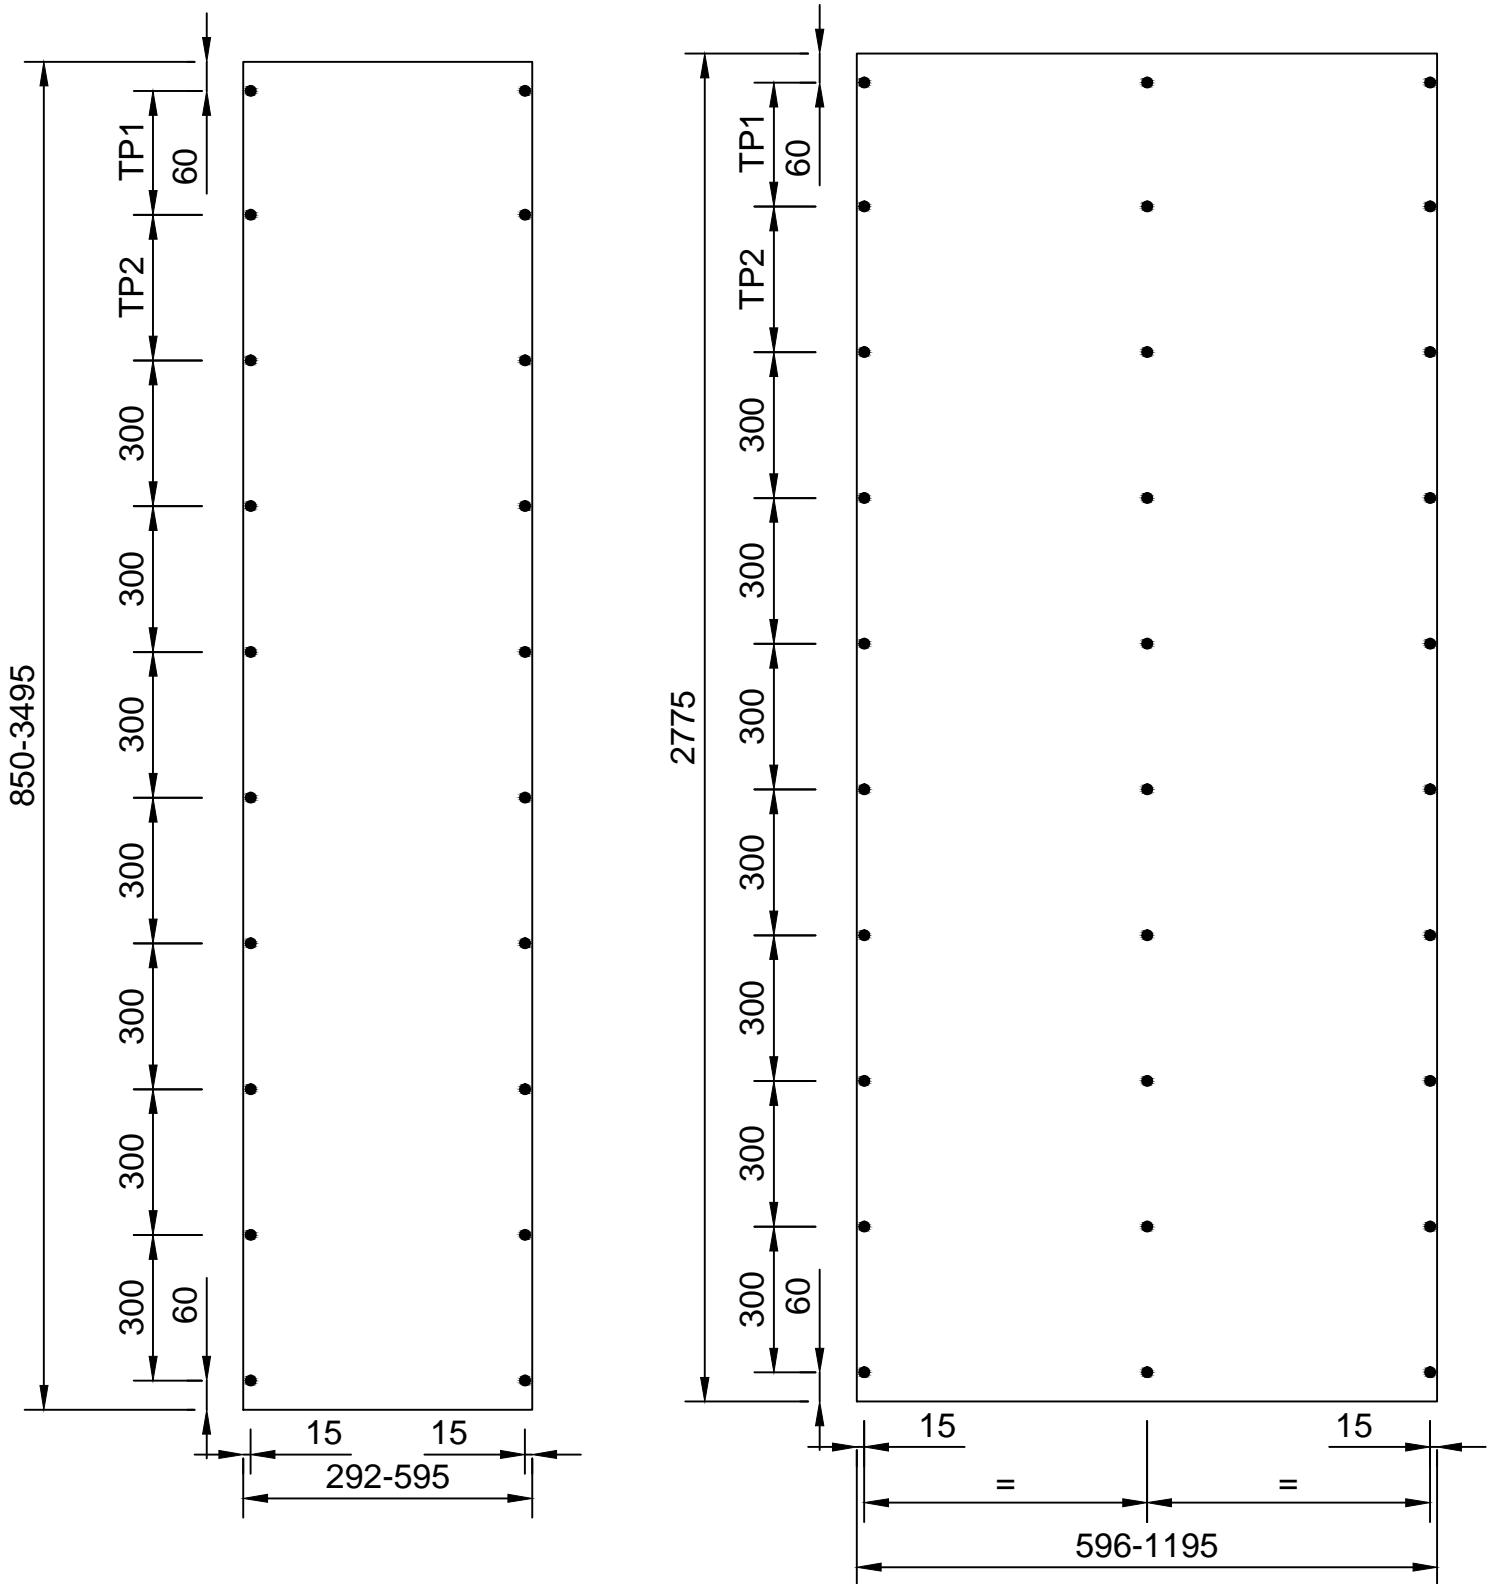


# NV05

# Steni Nature

Vertical fixing, c.2.c 300mm, with 15mm from edges


Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information se product list!

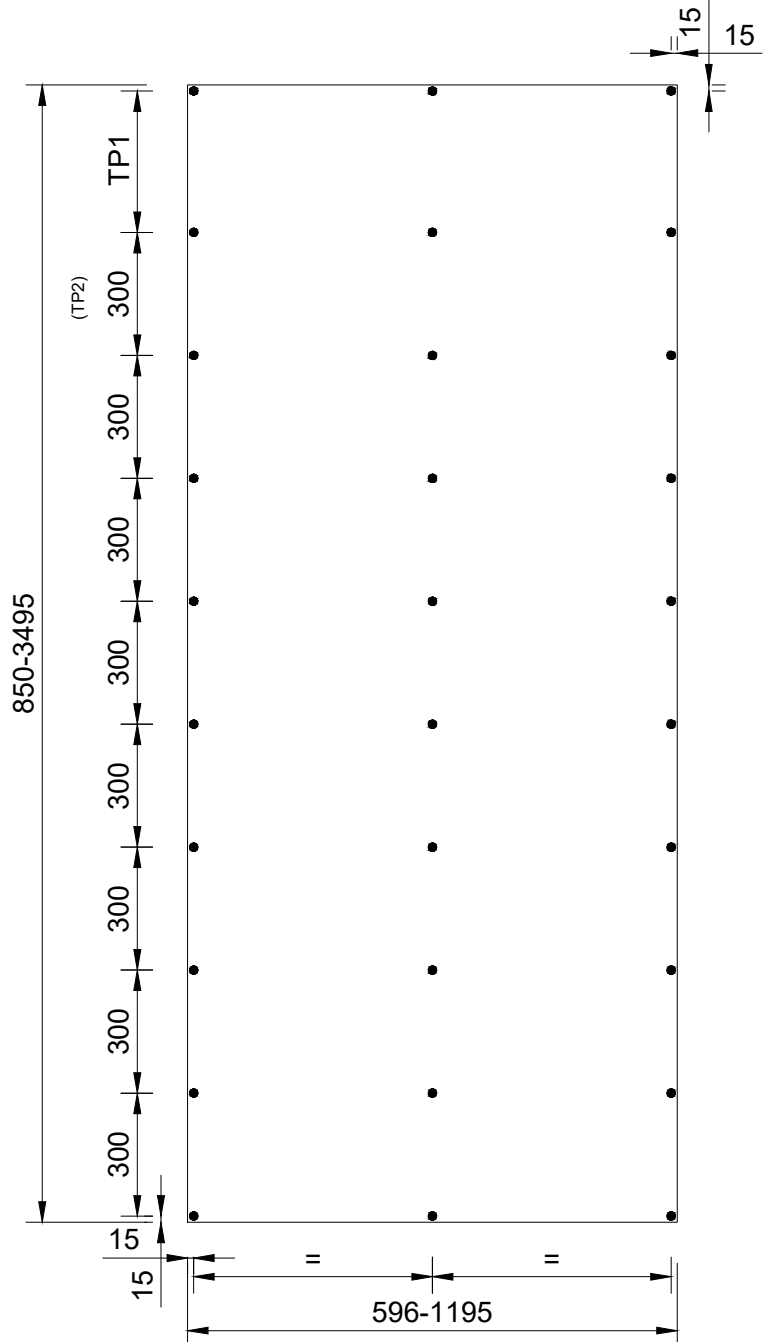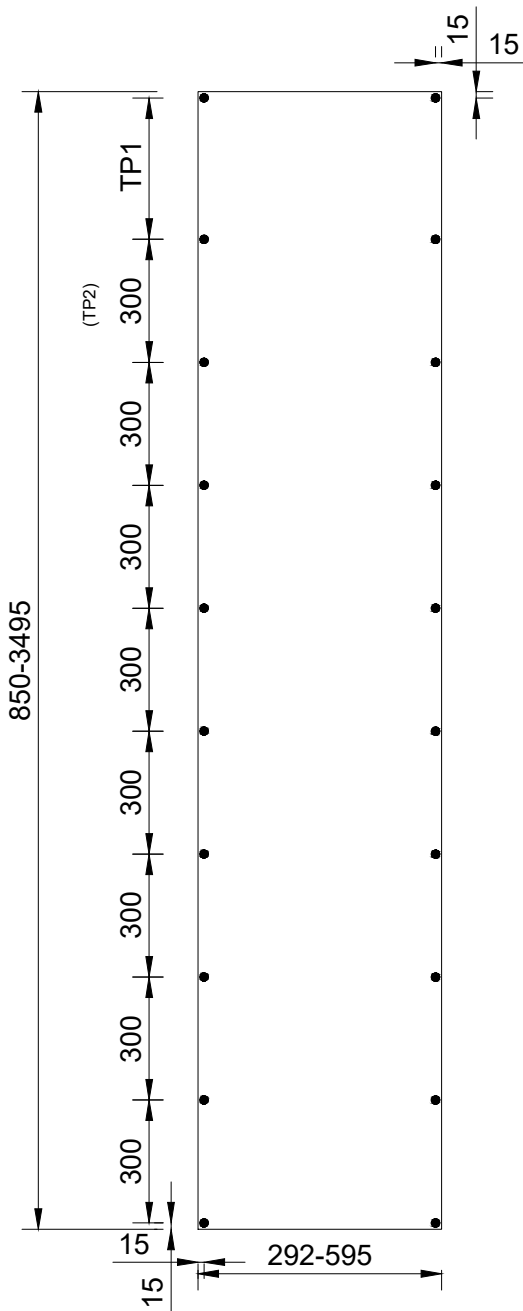

Vertical fixing, c.2.c 300mm (without left side drilled)



Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information se product list!

Disclaimer, Drill pattern and amount of screws is not according to Steni technical approval for fixing panels. We do not recommend edges/side distance more than 70mm. Non-conformity will be the customer's responsibility

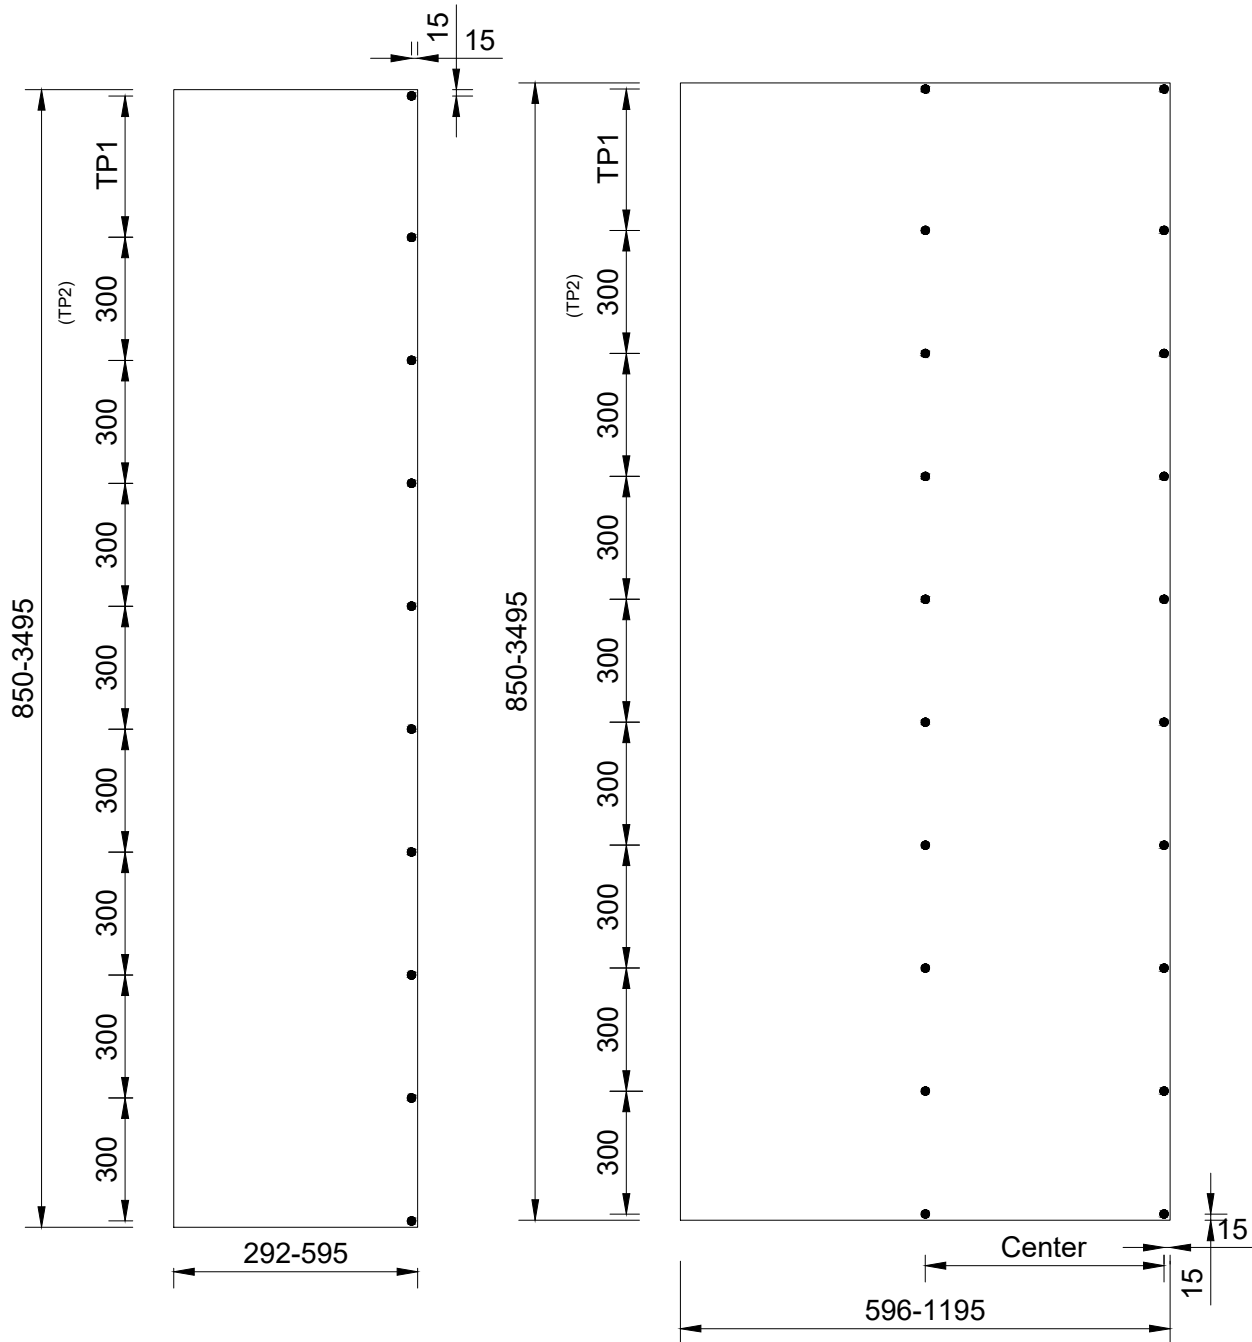

Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information se product list!

Disclaimer, Drill pattern and amount of screws is not according to Steni technical approval for fixing panels. We do not recommend edges/side distance more than 70mm. Non-conformity will be the customer's responsibility

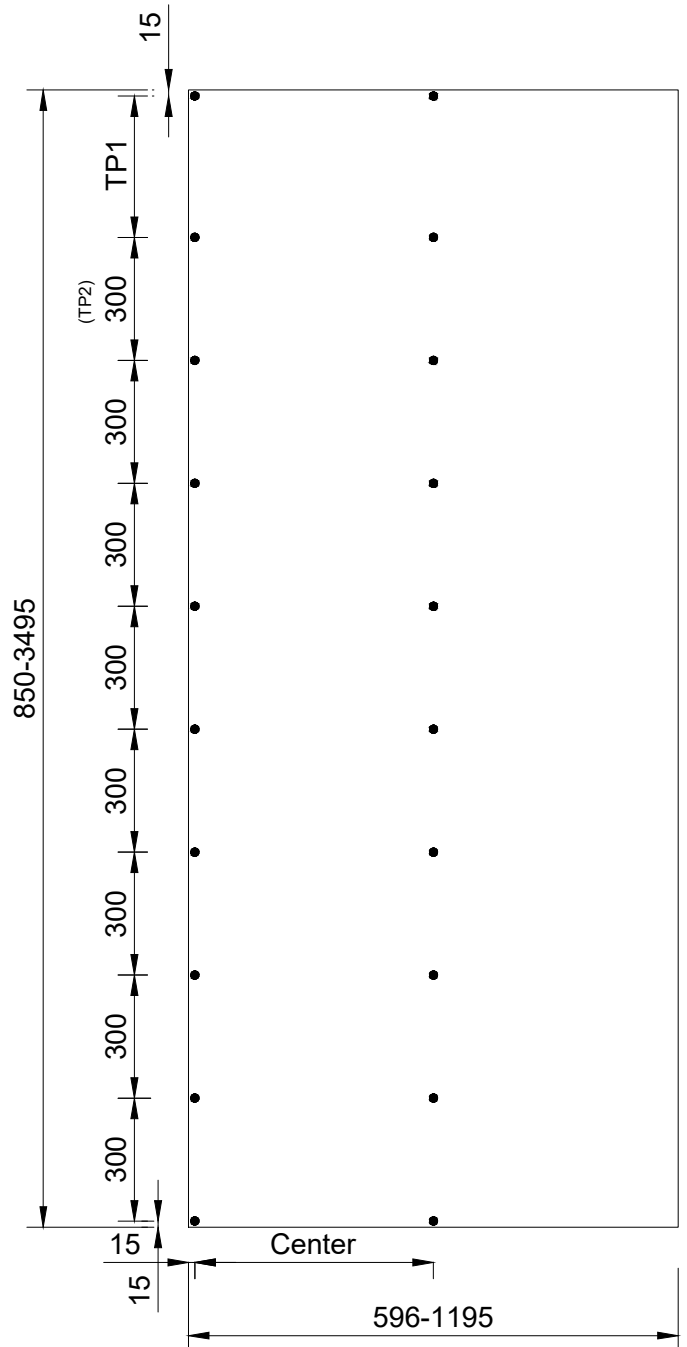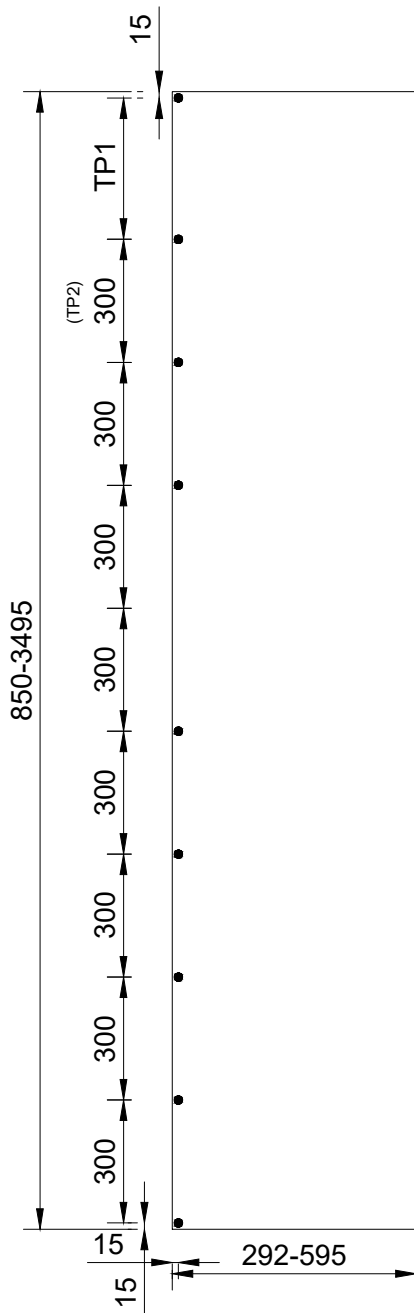

Vertical fixing, c.2.c 300mm (only right side drilled)

Limitations! Online cutting production dimensions; from width 292mm and length 850mm. for more information se product list!

Disclaimer, Drill pattern and amount of screws is not according to Steni technical approval for fixing panels. We do not recommend edges/side distance more than 70mm. Non-conformity will be the customer's responsibility

